



Machines

## Vibratory Double Drum Roller ARW 65

[www.ammann-group.com](http://www.ammann-group.com)









## One roller solves multiple tasks


### A universal machine

The economical, unique and multiple task roller, model ARW 65, can be used for soil compaction as well as for asphalt consolidation.

**Two performance levels are available by a simple adjustment of the amplitude:**

The large amplitude is used for soil and gravel compaction.

With the small amplitude the unit can be used on black top and bituminous surfaces.

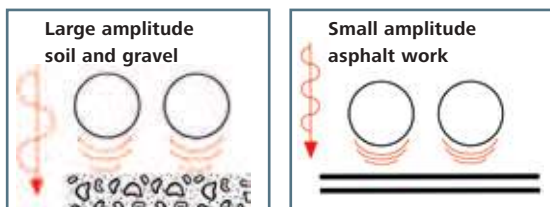

**The roller is equipped with alternative versions of powerful and reliable Hatz Diesel Engines.**

Hatz Supra 1 D 42 S is available with crank- or electric start. To avoid any possible down time in case of battery failure the engine always can be started manually.

Hatz 1 B 40 available with convenient electric start and economical manual rope start.

### Fully hydraulic

Vibration- and drive components are fully hydraulic. To keep service intervals to a minimum the unit has no mechanical fast wearing parts such as v-belts, clutch etc. The hydraulic drive ensures variable speed adjustment and smooth starting/breaking action.

### Entire side-clearance

**No more additional and time consuming work on edges and in confined areas:**

The side clearance on both sides allows compaction work extremely close to curbstones, retaining walls and other obstacles.

#### Electric start:

The more powerful Hatz 1 B 40 version carries electric start as a standard feature. E-start is definitely a recommended option on the Hatz 1 D 42 S version.



#### Safety is our highest priority:

Guide handle complete with dead man's handle hydraulic parking brake reduced reverse speed of 2.5 km/h.



## Fully hydraulic and much more

### A condensed overview of benefits and advantages

Air-cooled Hatz Diesel engine with integrated Oil Alert System powerful, service friendly and low emissions values



Sturdy protection frame with central lifting point

Large Water tank (60L) made of wear resistant polyurethane water sprinkler system for compaction work on bituminous material

The ergonomic and low vibration handle is foldable for easy transport. The integrated dead man's handle ensures maximum operator safety

Hydrostatic lever for forward and reverse as well as centrifugal force adjustment

Standard feature: integrated hydraulic parking brake

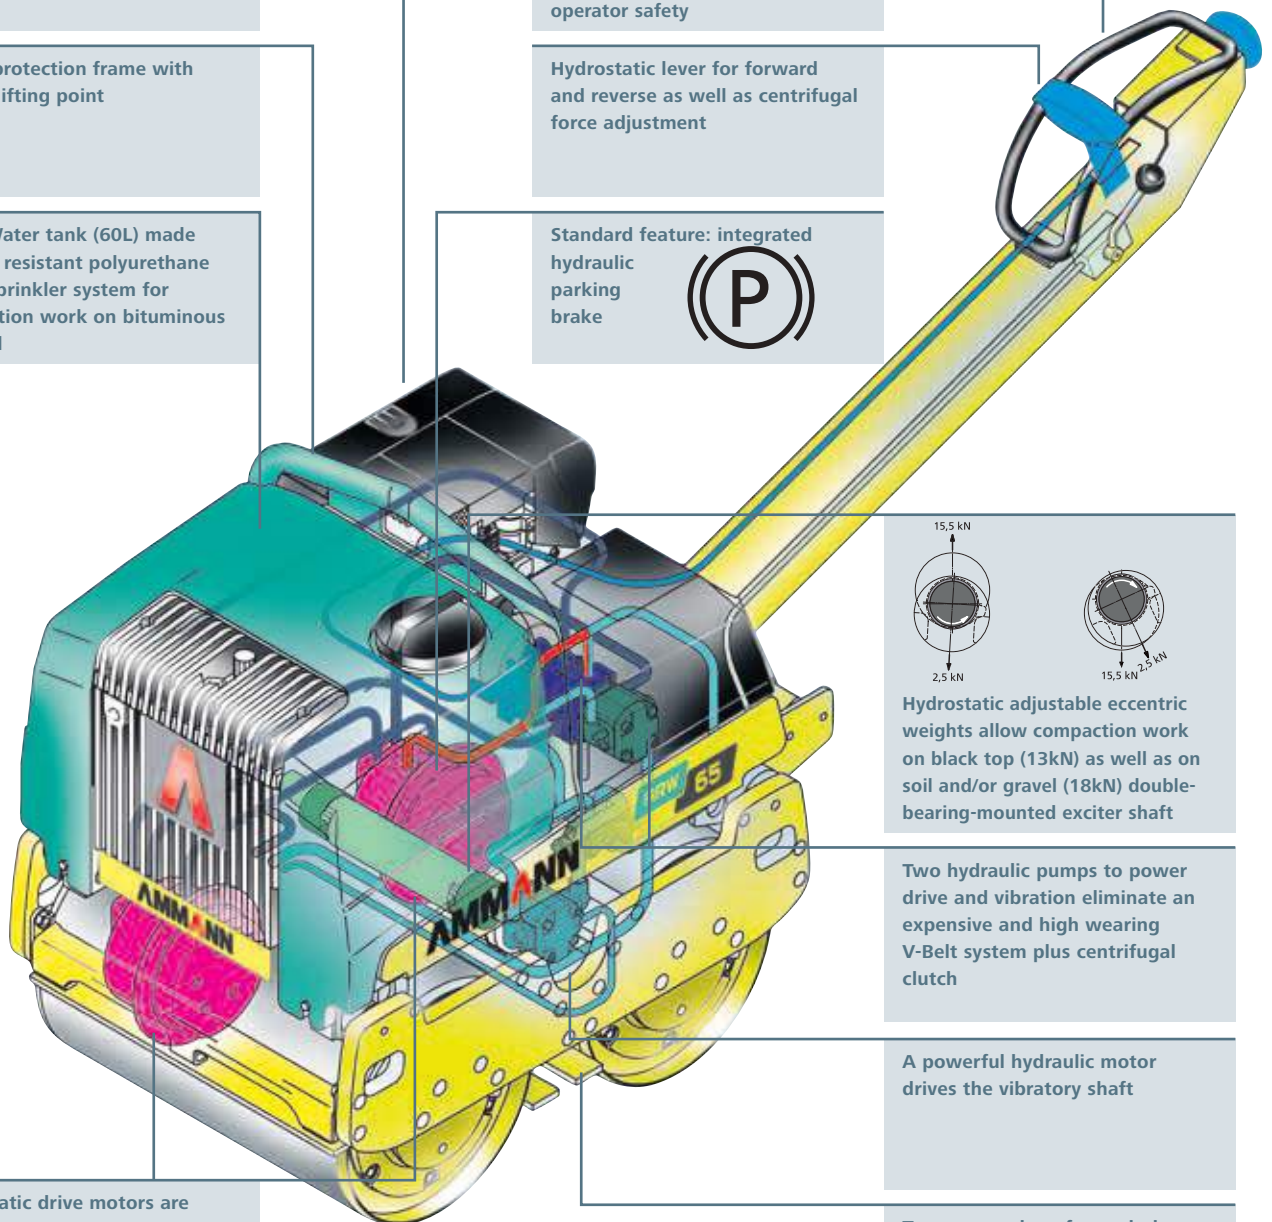

Two hydraulic pumps to power drive and vibration eliminate an expensive and high wearing V-Belt system plus centrifugal clutch

A powerful hydraulic motor drives the vibratory shaft

Hydrostatic drive motors are installed in both drums

Two scraper bars for each drum to ensure an absolute clean drum when working on asphalt




## Technical Data

		ARW 65 Hatz 1 D 42 S	ARW 65 Hatz 1 B 40
<b>Weight/Measurements</b>			
operating weight CECE	kg (lb)	720 (1584)	700 (1543)
net weight, standard version	kg (lb)	695 (1532)	690 (1521)
net weight, electric starter	kg (lb)	738 (1623)	690 (1521)
working width	mm (in)	650 (26)	650 (26)
linear pressure	kg/cm (lb/in)	5 (28)	5 (28)
<b>Drive</b>		hydrostatic	hydrostatic
diesel engine		Hatz 1D42 S	Hatz 1B40
performance	HP (kW)	8,3 (6,1)	8,6 (6,3)
travel speed, infinitely forward	km/h (mph)	4 (2,5)	4 (2,5)
travel speed, infinitely reverse	km/h (mph)	2,5 (1,6)	2,5 (1,6)
<b>Vibration</b>		hydrostatic	hydrostatic
centrifugal force	kN (lbf)	13/18 (2,9/4)	13/18 (2,9/4)
centrifugal force per cm drum width	N/cm (lb/in)	100/138 (57/79)	100/138 (57/79)
frequency	Hz (vpm)	55 (3300)	55 (3300)
max. gradeability with/without vibration	%	25/45	25/45
<b>Capacities</b>			
water	l (gal)	60 (13)	60 (13)
hydraulic oil	l (gal)	20 (4,4)	20 (4,4)
fuel	l (gal)	5 (1,1)	5 (1,1)
fuel consumption	l/h (gal/hr)	1,7 (0,4)	1,2 (0,3)
electric starter		Option	serienmäßig
<b>Optional equipment</b>			
operating hour meter		x	x
front protection frame		x	x
<b>Compaction performance*</b>			
large/small amplitude			
sand/gravel	cm (in)	30/25 (11,8/9,8)	30/25 (11,8/9,8)
cohesive soil	cm (in)	20/15 (7,9/5,9)	20/15 (7,9/5,9)

\*depending on ground condit

Specifications are subject to changes due to technical improvements

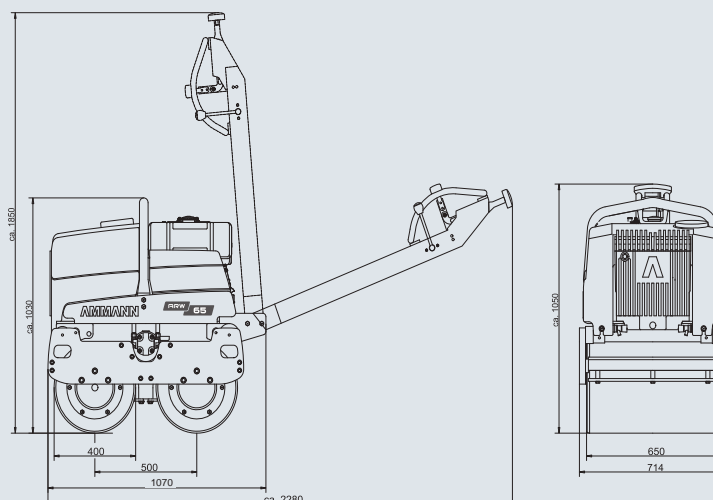

#### Ammann distribution companies

Germany  
Ammann Verdichtung GmbH  
D-53773 Hennef  
Tel +49 22 42 880 20  
Fax +49 22 42 88 02 59  
info.avd@ammann-group.com

France  
Ammann France SAS  
F-94046 Créteil/Cedex  
Tel +33 1 45 17 08 88  
Fax +33 1 45 17 08 90  
info.afr@ammann-group.com

United Kingdom  
Ammann Equipment Ltd.  
Bearley Stratford upon Avon  
GB-Warwickshire, CV37 8XY  
Tel +44 1789 414 525  
Fax +44 1789 414 495  
info.ael@ammann-group.com

USA  
Ammann America Inc.  
Ponte Vedra, Florida 32082, USA  
Tel +1 904 543 1691  
Fax +1 888 266 1210  
info@ammann-america.com

Russia  
Ammann Russland o.o.o.  
RU-129343 Moscow  
Tel +7 495 933 35 61  
Fax +7 495 933 35 67  
info.aru@ammann-group.com

Brasil  
Ammann do Brasil  
Gravataí -RS- Brasil 94180 - 452  
Tel +55 51 9315 3099  
info.abr@ammann-group.com

South Africa  
Ammann Construction Machinery  
South Africa  
229 Hull Road, Rynfiel, Benoni  
Tel +27 11 849 3939  
Fax +27 11 849 8889

United Arab Emirates  
Ammann NME / Dubai  
Dubai  
Tel +971 4 299 14 49 | 7  
Fax +971 4 299 14 49  
info.nme@ammann-group.com

#### Ammann manufacturing companies

Switzerland  
Ammann Schweiz AG  
CH-4901 Langenthal  
Tel +41 62 916 61 61  
Fax +41 62 916 64 03  
info.aag@ammann-group.com

Germany  
Ammann Verdichtung GmbH  
D-53773 Hennef  
Tel +49 22 42 880 20  
Fax +49 22 42 88 02 59  
info.avd@ammann-group.com

Czech Republic  
Ammann Czech Republic a.s.  
CZ-54901 Nové Město nad Metují  
Tel +420 491 476 111  
Fax +420 491 470 405  
info.acz@ammann-group.com

Ammann Spare Parts  
Tel +41 62 916 66 66  
Fax +41 62 916 6804  
spareparts.machines@ammann-group.com

